

PHILIPS

EasyKey



Change,
at your fingertips.

Content

The Philips Brand	01
-------------------	----

Product Portfolio

Alpha	03
9300	05
DDL702-1HW	07
DDL702-8HW	09
DDL702E	11
7300	13
7100	15
515K	17

Smart Door Lock Solution	19
--------------------------	----



EasyKey

Philips Digital
Door Locks

Premium quality originated in
the Netherlands

Innovation defines intelligence
Elaboration brings reassurance

About Philips Digital Door Lock

Philips Digital Door Lock is a new product category of Royal Philips. Driven by the perception of “Human centric innovation”, Philips digital door locks aim to evolve the use of traditional door locks through advanced technologies and offer the end users a hassle-free, convenient and reassuring home entry experience that meets their needs in all aspects.

Since the brand release, Philips Digital Door Lock has always been digging deep into its users' diverse demands and adhering to the ambition of simplifying people's way of living with constant and significant innovation. The product portfolio now covers 5 series (9000 series push-pull lock, 7000 series lever lock, Alpha series compact push-pull lock, 6000 series engineering lock, and 5000 series rim lock) and includes 7 models, which form a complete and mature system applicable to extensive scenarios.

As a member of the world-renowned Philips family, Philips Digital Door Lock endeavors to provide customers and consumers with industry-leading international standard services at all stages. Based on the idea of solving problems at the first time, the nationwide after-sales servicing network comprises not only 24-hour free service hotline, but also the capability of executing immediate door-to-door repair.

Now, throw away your keys and get ready to embrace a new level of convenience and peace of mind with Philips EasyKey!

PHILIPS

EasyKey

Smart push-pull door lock

Alpha

Wonderful life starts from α

Full automatic: more safety, more freedom



● Black



Full auto mortise



C-class lock cylinder



Dual verification mode



IML fiber-drawing finishing



Intuitive fingerprinting



Automatic locking



● Specifications

General Characteristics		Modes		Key Features	
Material	Aluminum alloy	Operation mode	Manual mode	Lock	Indoor deadlock
Finishing	Electroplating		Auto mode		System lock
	Baking varnishing	System unlock mode	General mode	Safety	Hidden PIN code
Color	Black		Dual verification mode		Outside forced lock mode
Handle	Push-pull handle	Electrical Power			Dual verification
Mortise	Full auto mortise	Working power supply	4 AA batteries	Alarm	Anti-prying alarm
	C-grade lock cylinder	Battery life	10 months*		Outside forced lock alarm
Fingerprint sensor	Semiconductor	Emergency charging	5V power bank		Abnormal latch bolt alarm
Connection	Bluetooth	Operating Environment		Networking	Generate PIN code
Access Solution		Working voltage	4.5-6V		Viewing access records
Outside unlocking	Fingerprint	Static working current	<115uA	Emergency escape	Indoor fast opening mortise
	PIN code	Dynamic working current	<55mA	Update	OTA or serial interface update
	Card	Temperature	-20°C- +60°C	Indicator	Low battery indicator
	Mechanical key	Humidity	15%RH-93%RH		Lock status indicator
Inside unlocking	Handle	Installation Requirements			Mute status indicator
	Button	Door thickness	38-60mm		System lock indicator
Capacity			60-90mm		Outside forced lock indicator
Fingerprint	100		90-120mm	Voice guide	Human voice guide
Card	100		Other range*		
Master PIN code	1	Door opening direction	Left-in/Left-out/ Right-in/Right-out		
User PIN code	10	Door type	Wooden/Copper/Security		
One-time PIN code	1				

* 10 months: The laboratory data, the actual battery life will vary depending on the using scenes.

* Other range: Please consult our service agent or an authorized dealer.

PHILIPS

EasyKey

9000 series

Smart push-pull
door lock

9300

Your entrance to smart life

Smart control via remote
access



Copper



PIN code
distributing



Access record
query



Indoor infrared
sensor



Dual verification
mode



Intuitive
fingerprinting



Automatic
locking



● Specifications

General Characteristics		Modes		Key Features	
Material	Aluminum alloy, glass	Operation mode	Manual mode	Lock	Indoor deadlock
Finishing	Electroplating		Auto mode		System lock
	Baking varnishing	System unlock mode	General mode	Safety	Hidden PIN code
Color	Copper		Dual verification mode		Outside forced lock mode
Handle	Push-pull handle	Electrical Power			Dual verification
Mortise	Full auto mortise	Working power supply	4 AA batteries	Alarm	Anti-prying alarm
	C-grade lock cylinder	Battery life	10 months*		Outside forced lock alarm
Fingerprint sensor	Semiconductor	Emergency charging	5V power bank		Abnormal latch bolt alarm
Connection	Gateway	Operating Environment		Remote	Unlock when link
Access Solution		Working voltage	4.5-6V	controlling	with smart door viewer*
Outside unlocking	Fingerprint	Static working	<110uA		Add PIN codes
	PIN code	current	(With gateway)		Door lock parameter settings
	Card	Dynamic working	<50mA	Emergency escape	Indoor fast
	Mechanical key	current	(With gateway)		opening mortise
Inside unlocking	App	Temperature	-20°C- +60°C	Update	OTA or serial interface update
	Knob	Humidity	15%RH-93%RH	Indicator	Low battery indicator
	Button	Installation Requirements			Lock status indicator
Capacity	Infrared induction	Door thickness	38-60mm		Mute status indicator
			60-90mm		System lock indicator
			90-120mm		Outside forced lock indicator
Fingerprint	100		Other range*		Indoor infrared unlocking indicator
Card	100	Door opening	Left-in/Left-out/	Open/Close infrared unlocking indicator	
Master PIN code	1	direction	Right-in/Right-out	Voice guide	Human voice guide
User PIN code	10	Door type	Wooden/Copper/Security		
One-time PIN code	1				

* 10 months: The laboratory data, the actual battery life will vary depending on the using scenes.

* Other range: Please consult our service agent or an authorized dealer.

* Smart door viewer: The Philips smart door viewer needs to buy separately.

PHILIPS

EasyKey

7000 Series

Smart video door lock

DDL702-1HW

Remote video monitoring

Visible security



Copper



Two-way audio talk



PIN code distributing



Access record query



Built-in electronic doorbell



Wi-Fi



Automatic locking



● Specifications

General Characteristics	System mode	General mode	PIR motion alert
Material	Zinc alloy	Dual verification mode	Networking
Finishing	Baking varnish	Electrical Power	Remotely add a PIN code
	Electroplating	Power supply	Li-polymer battery
Color	Copper red	Battery life	3 months*
Handle	Push-pull handle	Emergency power supply	5V Powerbank
Mortise	Full auto mortise	Operating Environment	Doorbell & Video
	C-grade lock cylinder	Temperature	-20°C- +60°C
Fingerprint sensor	Semiconductor sensor	Humidity	15%RH-93%RH
Connectivity	Wi-Fi	Installation Requirements	Door opening direction
Access Solution		Door thickness	38-60mm
Outdoor unlocking	Fingerprint		60-90mm
	PIN code		90-120mm
	Mechanical key		Other ranges*
	Temporary PIN code	Door opening direction	Left-in/Left-out,
Indoor unlocking	Rotary knob		Right-in/Right-out
	Button	Door type	Wooden/Copper/Security door
	Infrared sensor	Key Features	
Capacity		Locking function	Indoor deadlock
Fingerprint	100		System lock
Master PIN code	1	Safety	Hidden PIN code
User PIN code	20		Outside forced lock
One-time PIN code	1		Dual verification
Modes		Alert	Anti-dismantling alert
Operation mode	Manual mode		Outside forced lock alert
	Auto mode		Abnormal latch bolt alert
			Indoor infrared sensor unlock indicator
			On/Off indoor infrared sensor indicator
			Doorbell indicator
			Voice guide
			Human voice guide
			Visitor's arrival notification
			Surveillance of all front door activities after Wi-Fi connected
			Two-way talk via App
			Emergency escape
			Indoor fast opening mortise
			Update
			OTA & Batch update via rear interface
			Indicators
			Low battery level indicator
			Lock status indicator
			Mute status indicator
			System lock indicator
			Outside forced lock indicator

* 3 months: The laboratory data, the actual battery life will vary depending on the using scenes.

* Other range: Please consult our service agent or an authorized dealer.

Product specifications are subject to modify without prior notice.

The Philips and the Philips Shield Emblem are registered trademarks and property of Koninklijke Philips N.V. and are used under license.

PHILIPS

EasyKey

7000 series

Smart facial
recognition door
lock

DDL702-8HW

Enjoy touchless unlock experience

With 3D face unlock



Copper



Wi-Fi
connection



PIN code
distributing



Access record
query



Facial
recognition



Indoor infrared
sensor



Automatic
locking



● Specifications

General Characteristics		Modes		Key Features	
Material	Zinc alloy	Operation mode	Manual mode	Lock	Indoor deadlock
Finishing	Electroplating		Auto mode		System lock
	Baking varnishing	System unlock mode	General mode	Safety	Hidden PIN code
Color	Copper		Dual verification mode		Outside forced lock mode
Handle	Push-pull handle	Electrical Power			Dual verification
Mortise	Full auto mortise	Working power supply	8 AA batteries	Alarm	Anti-prying alarm
	C-grade lock cylinder	Battery life	6 months*		Outside forced lock alarm
Fingerprint sensor	Semiconductor	Emergency charging	5V power bank		Abnormal latch bolt alarm
Connection	Wi-Fi	Operating Environment		Remote	Door lock parameter settings
Access Solution		Working voltage	7.2-12V	controlling	Access record query
Outside unlocking	Facial recognition	Static working	<45uA	Emergency escape	Indoor fast
	Fingerprint	current	(With module)		opening mortise
	PIN code	Dynamic working	<55mA	Update	OTA or serial interface update
	Mechanical key	current	(With module)	Indicator	Low battery indicator
	—	Temperature	-20°C- +60°C		Lock status indicator
Inside unlocking	Knob	Humidity	15%RH-93%RH		Mute status indicator
	Button	Installation Requirements			System lock indicator
	Infrared induction	Door thickness	38-60mm		Outside forced lock indicator
Capacity			60-90mm		Indoor infrared unlocking indicator
Fingerprint	100		90-120mm	Open/Close infrared unlocking indicator	
Facial recognition	20		Other range*	Voice guide	Human voice guide
Master PIN code	1	Door opening	Left-in/Left-out/		
User PIN code	10	direction	Right-in/Right-out		
One-time PIN code	1	Door type	Wooden/Copper/Security		

* 6 months: The laboratory data, the actual battery life will vary depending on the using scenes.

* Other range: Please consult our service agent or an authorized dealer.

PHILIPS

EasyKey

7000 series

Smart push-pull
door lock

DDL702E

Touch to unlock

Way easier with Wi-Fi
connection



●
Black



Wi-Fi
connection



PIN code
distributing



Access record
query



Dual verification
mode



Indoor infrared
sensor



Automatic
locking



● Specifications

General Characteristics		Modes		Key Features	
Material	Zinc alloy	Operation mode	Manual mode	Lock	Indoor deadlock
Finishing	Electroplating		Auto mode		System lock
	Baking varnishing	System unlock mode	General mode	Safety	Hidden PIN code
Color	Black		Dual verification mode		Outside forced lock mode
Handle	Push-pull handle	Electrical Power			Dual verification
Mortise	Full auto mortise	Working power supply	4 AA batteries	Alarm	Anti-prying alarm
	C-grade lock cylinder	Battery life	6 months*		Outside forced lock alarm
Fingerprint sensor	Semiconductor	Emergency charging	5V power bank		Abnormal latch bolt alarm
Connection	Wi-Fi	Operating Environment		Remote	PIN code distributing
Access Solution		Working voltage	4.5-6V	controlling	Access record query
Outside unlocking	Fingerprint	Static working	<58uA	Emergency escape	Indoor fast
	PIN code	current	(With module)		opening mortise
	Card	Dynamic working	<58mA	Update	OTA or serial interface update
	Mechanical key	current	(With module)	Indicator	Low battery indicator
	—	Temperature	-20°C- +60°C		Lock status indicator
Inside unlocking	Knob	Humidity	15%RH-93%RH		Mute status indicator
	Button	Installation Requirements			System lock indicator
	Infrared induction	Door thickness	38-60mm		Outside forced lock indicator
Capacity			60-90mm		Indoor infrared unlocking indicator
Fingerprint	100		90-120mm	Open/Close infrared unlocking indicator	
Card	100		Other range*	Voice guide	Human voice guide
Master PIN code	1	Door opening	Left-in/Left-out/		
User PIN code	10	direction	Right-in/Right-out		
One-time PIN code	1	Door type	Wooden/Copper/Security		

* 6 months: The laboratory data, the actual battery life will vary depending on the using scenes.

* Other range: Please consult our service agent or an authorized dealer.

PHILIPS

EasyKey

7000 series

Smart lever door lock

7300

Unlock in one go

Couldn't be simpler



Copper



Unlock in one go



C-class lock cylinder



Various ways of unlocking



Dual verification mode



Safe handle



Automatic locking



● Specifications

General Characteristics		Modes		Key Features	
Material	Aluminum alloy	Operation mode	Manual mode	Lock	Indoor deadlock
Finishing	Electroplating		Auto mode		System lock
	Baking varnishing	System unlock mode	General mode	Safety	Hidden PIN code
Color	Copper		Dual verification mode		Outside forced lock mode
Handle	Lever handle	Electrical Power			Dual verification
Mortise	Auto mortise	Working power supply	4 AA batteries	Alarm	Anti-prying alarm
	C-grade lock cylinder	Battery life	10 months*		Outside forced lock alarm
Fingerprint sensor	Semiconductor	Emergency charging	5V power bank		Abnormal latch bolt alarm
Connection	Bluetooth	Operating Environment		Networking	Generate PIN code
Access Solution		Working voltage	4.5-6V		Viewing access records
Outside unlocking	Fingerprint	Static working current	<88uA	Emergency escape	Indoor fast opening mortise
	PIN code	Dynamic working current	<43mA	Update	OTA or serial interface update
	Card	Temperature	-20°C- +60°C	Indicator	Low battery indicator
	Mechanical key	Humidity	15%RH-93%RH		Lock status indicator
	APP	Installation Requirements			Mute status indicator
Inside unlocking	Handle	Door thickness	38-60mm		System lock indicator
	Button		60-90mm		Outside forced lock indicator
	—		90-120mm	Voice guide	Human voice guide
Capacity			Other range*		
Fingerprint	100	Door opening direction	Left-in/Left-out/ Right-in/Right-out		
Card	100	Door type	Wooden/Copper/Security		
Master PIN code	1				
User PIN code	10				
One-time PIN code	1				

* 10 months: The laboratory data, the actual battery life will vary depending on the using scenes.

* Other range: Please consult our service agent or an authorized dealer.

PHILIPS

EasyKey


7000 series

Smart lever door lock

7100

Trusted and reliable performance

Enjoy your family life in comfort and security

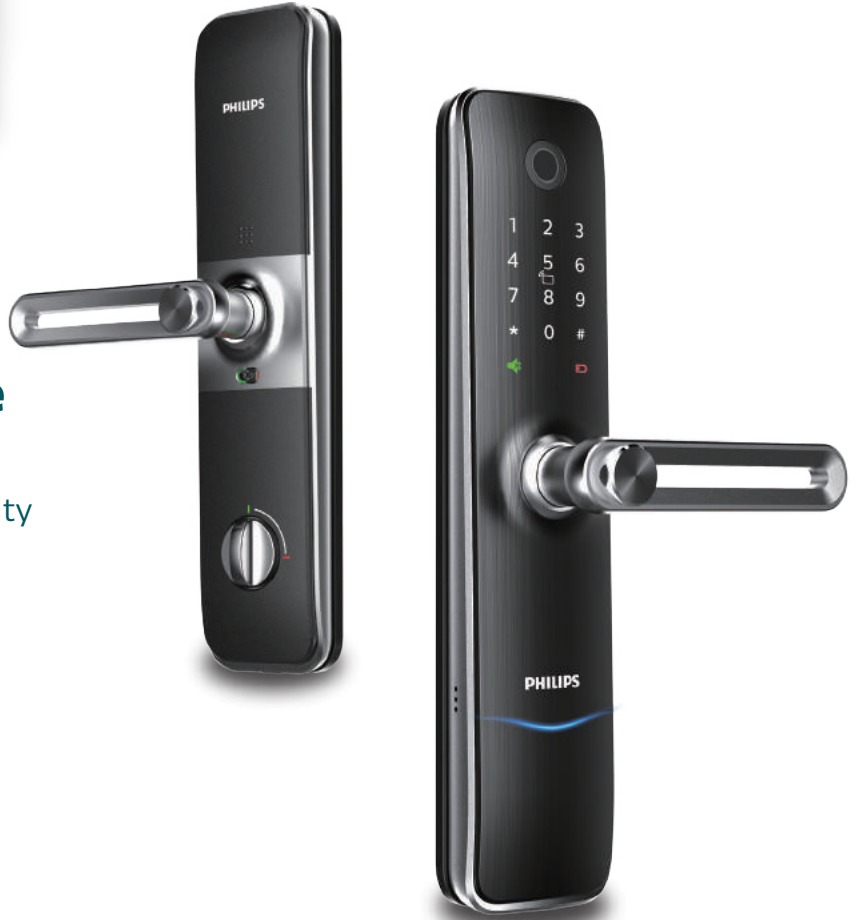

● Silver ● Copper



Safe handle



C-class lock cylinder



Various ways of unlocking




Dual verification mode



Free lever handle



Universal installation

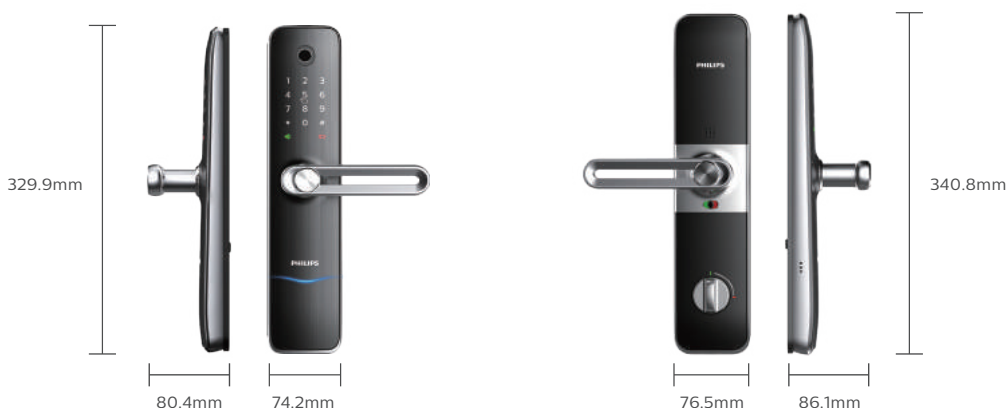

● Specifications

General Characteristics		Modes		Key Features	
Material	Aluminum alloy	Operation mode	Manual mode	Lock	Indoor deadlock
Finishing	Electroplating		—		System lock
	Baking varnishing	System unlock mode	General mode	Safety	Hidden PIN code
Color	Sliver/Copper		Dual verification mode		Outside forced lock mode
Handle	Lever handle	Electrical Power			Dual verification
Mortise	Electronic mortise	Working power supply	4 AA batteries	Alarm	Anti-prying alarm
	C-grade lock cylinder	Battery life	10 months*		Mechanical key unlocking alarm
Fingerprint sensor	Semiconductor	Emergency charging	5V power bank	Emergency escape	Indoor fast opening mortise
Connection	—	Operating Environment		Update	OTA or serial interface update
Access Solution		Working voltage	4.5-6V	Indicator	Low battery indicator
Outside unlocking	Fingerprint	Static working current	<45uA		Lock status indicator
	PIN code	Dynamic working current	<35mA	Mute status indicator	
	Card	Temperature	-20°C- +60°C	System lock indicator	
Inside unlocking	Mechanical key	Humidity	15%RH-93%RH	Voice guide	Human voice guide
	Handle	Installation Requirements			
	—	Door thickness	38-60mm		
	—		60-90mm		
Capacity			90-120mm		
Fingerprint	100		Other range*		
Card	100	Door opening direction	Left-in/Left-out/ Right-in/Right-out		
Master PIN code	1	Door type	Wooden/Copper/Security		
User PIN code	10				
One-time PIN code	1				

* 10 months: The laboratory data, the actual battery life will vary depending on the using scenes.

* Other range: Please consult our service agent or an authorized dealer.

PHILIPS

EasyKey

5000 series

Smart rim door lock

515K

Easy to install

Enjoy privacy with the simple design and easy installation



Black



IML brushed finishing



3-proof mortise (anti-prying/-sawing/collision)



Fake PIN code



Auto locking



Multiple access solutions



Emergency power interface



● Specifications

Access Solution	Color	Black	Door opening direction	Left-in	Left-out
Fingerprint		Golden		Right-in	Right-out
PIN code	Capacity		Door type	Wooden/Copper/Security doors	
Card	Fingerprint	100			
Bluetooth	Card	100	Accessories		
Mechanical key	Master PIN code	1	Striker	✓	
Remote controller	User PIN code	10	Striker cover	✓	
Smart Door Lock Function	One-time PIN code	1	Mounting plate	✓	
Safety	Mode		User manual	✓	
	Operation mode	Manual mode	Quick start guide	✓	
		Auto mode	Warranty card	✓	
Locking	System setup mode	Normal mode	Certificate	✓	
Alarming	Anti-prying alarm	System mode	Card	2	
	Anti-dismantling alarm	Dual verification mode	Mechanical key	2	
	Anti-theft alarm	Power	Remote controller	✓	
Easy Operation	Battery type	Alkaline battery	Remote control module	✓	
Indicator light	Power supply	4 AA batteries	Installation kit	✓	
	Maximum battery capacity	4	Cleaning pad	✓	
	Mute status indication	Working voltage			
	System lock indication	Service time			
Voice guide	Human voice guide	Emergency power			
		5V power bank			
Design and Appearance	Installation				
Fingerprint sensor	Semiconductor	Door thickness			
		30-50 mm			
		50-90 mm			
Main material	Zinc alloy	90-120 mm			
Finishing	Electroplating	Other range*			


*8 months: May be less depending on actual usage.

*Other range: Please consult our service agent or an authorized dealer.

Smart Door Lock Solution

Full smart life starts from here



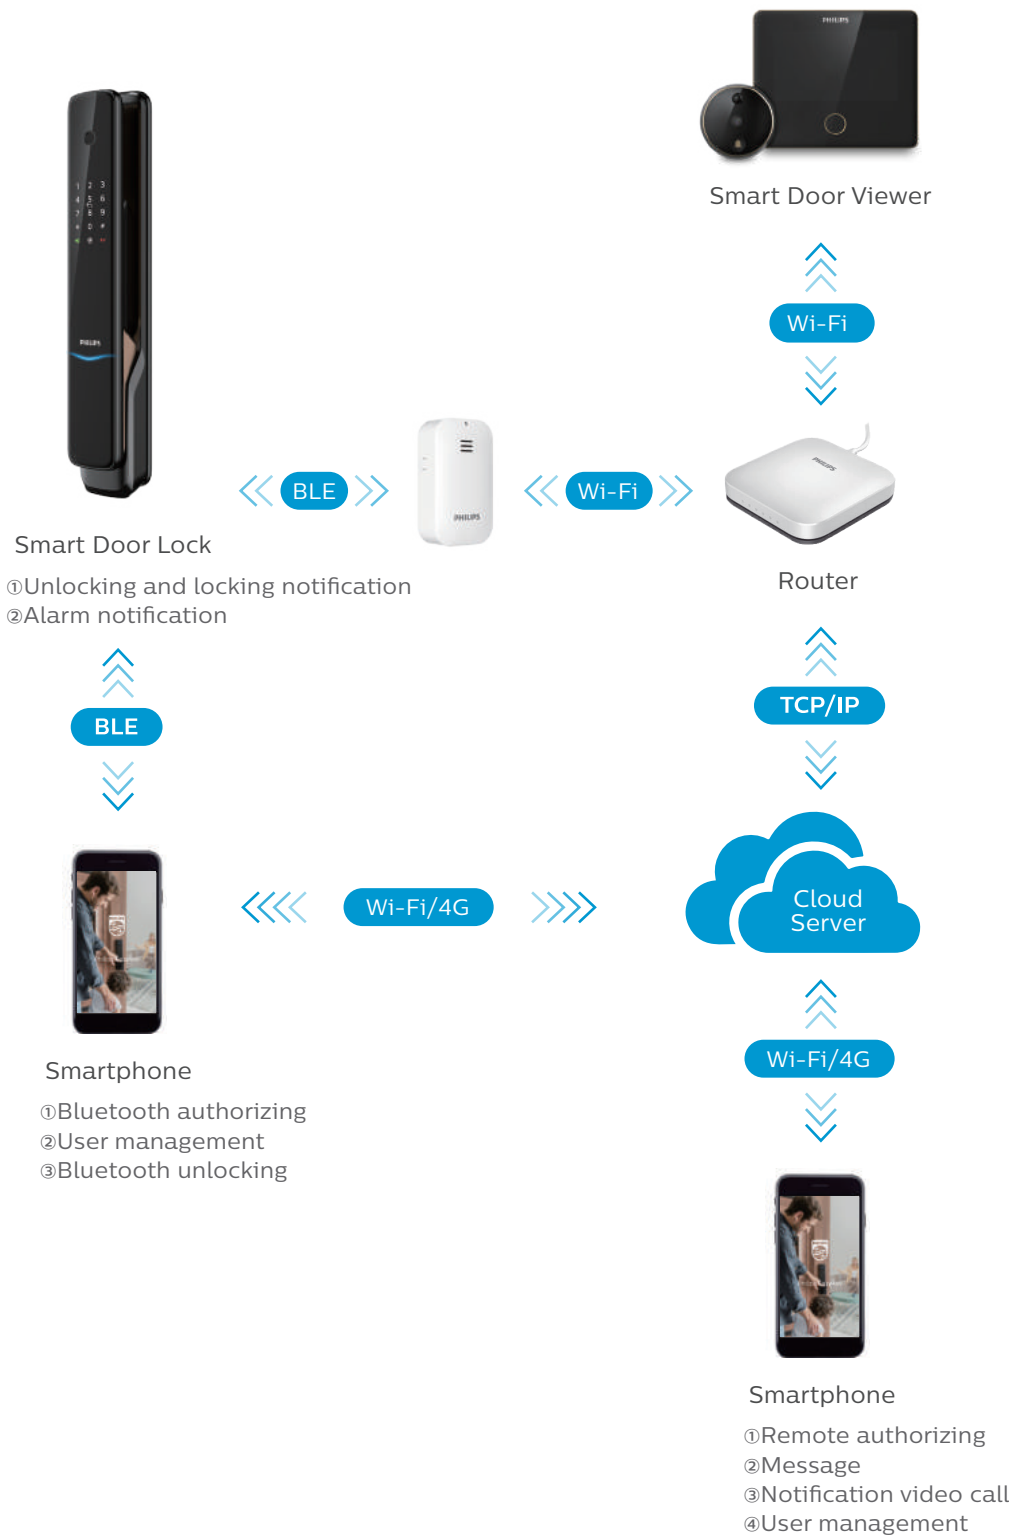



© 2021 Koninklijke Philips N.V. All rights reserved. Philips EasyKey reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.